

# PLANET LINEUP 2018

## LED LIGHTING

### Circular Type



# LED 원형 산업등(냉동창고 겸용)

- ✓ 메탈할라이드 램프 250W 대체
- ✓ 전기요금 70%절감!!!



국내 6,000개 이상 설치!

Capacitor less 반영구적 구동회로!

PHC12-T56  
PHC12-T80-LM

Fixed LED Luminaries (56W, 80W)


**PLANET**  
LED LIGHTING NETWORK  
SOLUTION & PRODUCTS




## 제품사양

항목	PHC12-T56	PHC12-T80_LM
정격전압	AC 220V / 60 Hz	AC 220V / 60 Hz
정격전류	0.27A ±10%	0.38A ±10%
소비전력(W)	56W ±10%	80W ±10%
총 광 속	6,720lm	9,600lm
광 효율	120 lm/W	120 lm/W
연색성	85Ra	86Ra
색온도	5,665K (±355K)	5,665K (±355K)
지향각	120도 (중앙 70도)	120도 (중앙 70도)
동작온도	-30~40°C	-30~40°C
역률	0.95	0.95
LED 사양	0.2W급 65mA/ 300개	0.3W급 100mA/ 300개
컨버터사양	내장형 컨버터(Capacitor less 타입)	내장형 컨버터(Capacitor less 타입)
중량	3.8kg	3.8kg
사이즈(mm)	300Ø X 218	300Ø X 218
인증	KC	KC


## 배광 (70°)

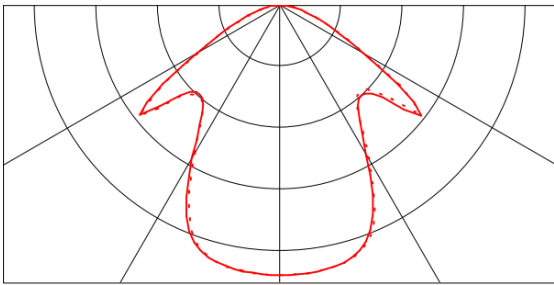

## 직하조도

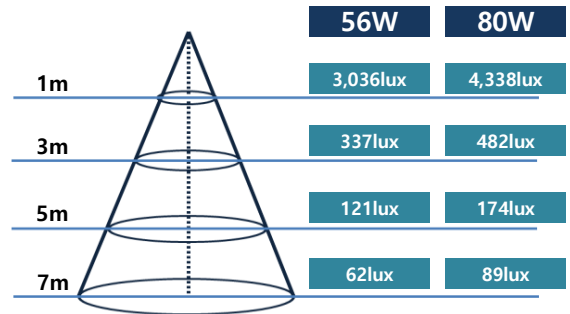

## 외관도

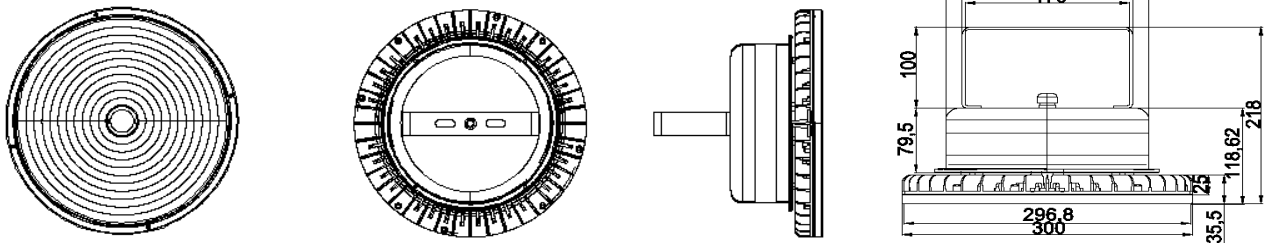

## 설치사례

- 우진세렉스 (2011)
- 롯데삼강 (2012~)
- 태광공장 (2013~)



# LED 원형 산업등

- ✓ 메탈할라이드 램프 250W 대체
- ✓ 전기요금 70%절감!!!
- ✓ “Anydim” 컨버터 적용




별도의 배선 없이 3단계 디밍 조절 기능!

PHB-10012A-DA  
PHB-12012A-DA

LED High Bay Light (100W,120W)


**PLANET**  
LED LIGHTING NETWORK  
SOLUTION & PRODUCTS

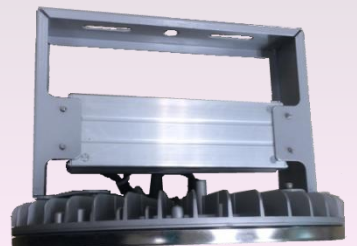


## 제품사양

항목	PHB-10512A-DA	PHB-12012A-DA
정격전압	AC 220V / 60 Hz	AC 220V / 60 Hz
소비전력(W)	105W ±10%	120W ±10%
총 광 속	12,600lm	14,400lm
광 효율	120 lm/W	120 lm/W
연색성	85Ra	85Ra
색온도	5,665K (±355K)	5,665K (±355K)
지향각	110도 (중앙 70도)	110도 (중앙 70도)
동작온도	-30~40°C	-30~40°C
역률	0.95	0.95
LED 사양	0.3W급 100mA/ 288개	0.3W급 100mA/ 368개
컨버터사양	외장형 컨버터	외장형 컨버터
중량	4.2kg	4.2kg
사이즈(mm)	300Ø X 211	300Ø X 211
인증	KC	KC
디밍기능	3단계 조도 조절 (100%, 50%, 25%)	3단계 조도 조절 (100%, 50%, 25%)




## 배광 (70°)

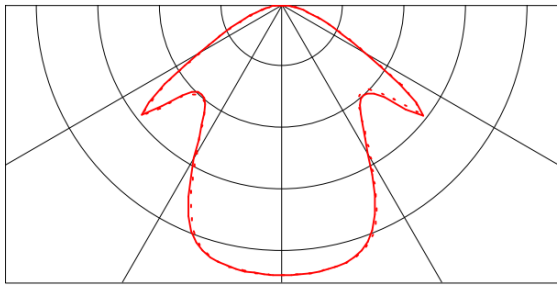

## 직하조도

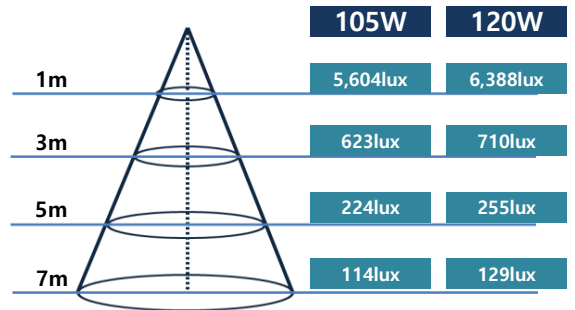

## 외관도



## 설치사례

- 우진프라임 (2015)

